


Refurbishment outlets for roofs without heat insulation TOPWET TW SAN BZ

BASIC INFORMATION

purpose	for drainage of flat roofs with connection to the original outlet or pipe without a neck
material	outlet body – polyamide PA6, protective basket – polyamide PA6, refurbishment seal – EPDM
integrated connection sleeve	BIT – modified bitumen strip SBS, PVC – mPVC based foil, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PE – polyethylene foil, STE – a sleeve for connecting of waterproofing screed
colour	grey/white
load category	H 1,5
certification	EN 1253-2:2015 - Gullies for buildings - Part 2: Roof drains and floor gullies without trap
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

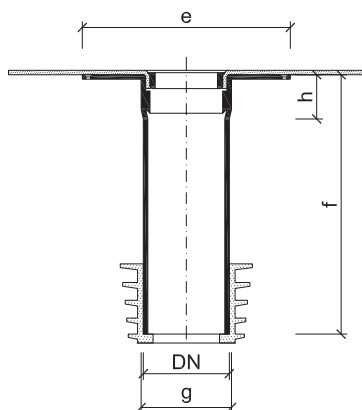

Refurbishment and reconstruction of roofs without heat insulation

Type	For connection to piping of diameter [mm]	DN	Dimensions [mm]			
			e	f*	g	h
TW SAN BZ 50	54-72	50	250	400	56	60
TW SAN BZ 75	79-102	70	250	400	81	60
TW SAN BZ 90	99-106	90	250	400	96	60
TW SAN BZ 100	106-116	100	250	400	116	60
TW SAN BZ 110	116-129	100	250	400	116	60
TW SAN BZ 125	144-154	125	250	400	131	60

* upon order it is possible to extend up to 1,000 mm

The outlet can be pushed in an existing outlet, pipe or gutter as far as the neck but it has lower outflow capacity.