


Square gutter spouts TOPWET TWC



BASIC INFORMATION

purpose	drainage of flat roofs, terraces and balconies
material	PVC – UV Stabil
Integrated connection sleeve	BIT – modified bitumen strip SBS, PVC – mPVC based foil, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PE – polyethylene foil, STE – a sleeve for connecting of waterproofing screed
colour	white
certification	EN 1253-2:2015 - Gullies for buildings - Part 2: Roof drains and floor gullies without trap
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

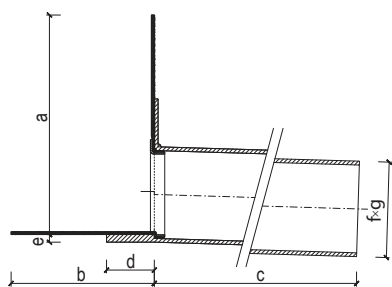

Square gutter spouts

Type	Dimensions [mm]						
	a	b	c*	d	e	f	g
TWC 50x100	300	200	500	50	8	50	100
TWC 50x150	300	200	500	50	8	50	150
TWC 100x100	300	200	500	50	8	100	100
TWC 100x300	300	200	500	50	8	100	300
TWC 150x150	300	200	500	50	8	150	150

* upon order it is possible to extend up to 1,000 mm